



Rotary Log Singulator

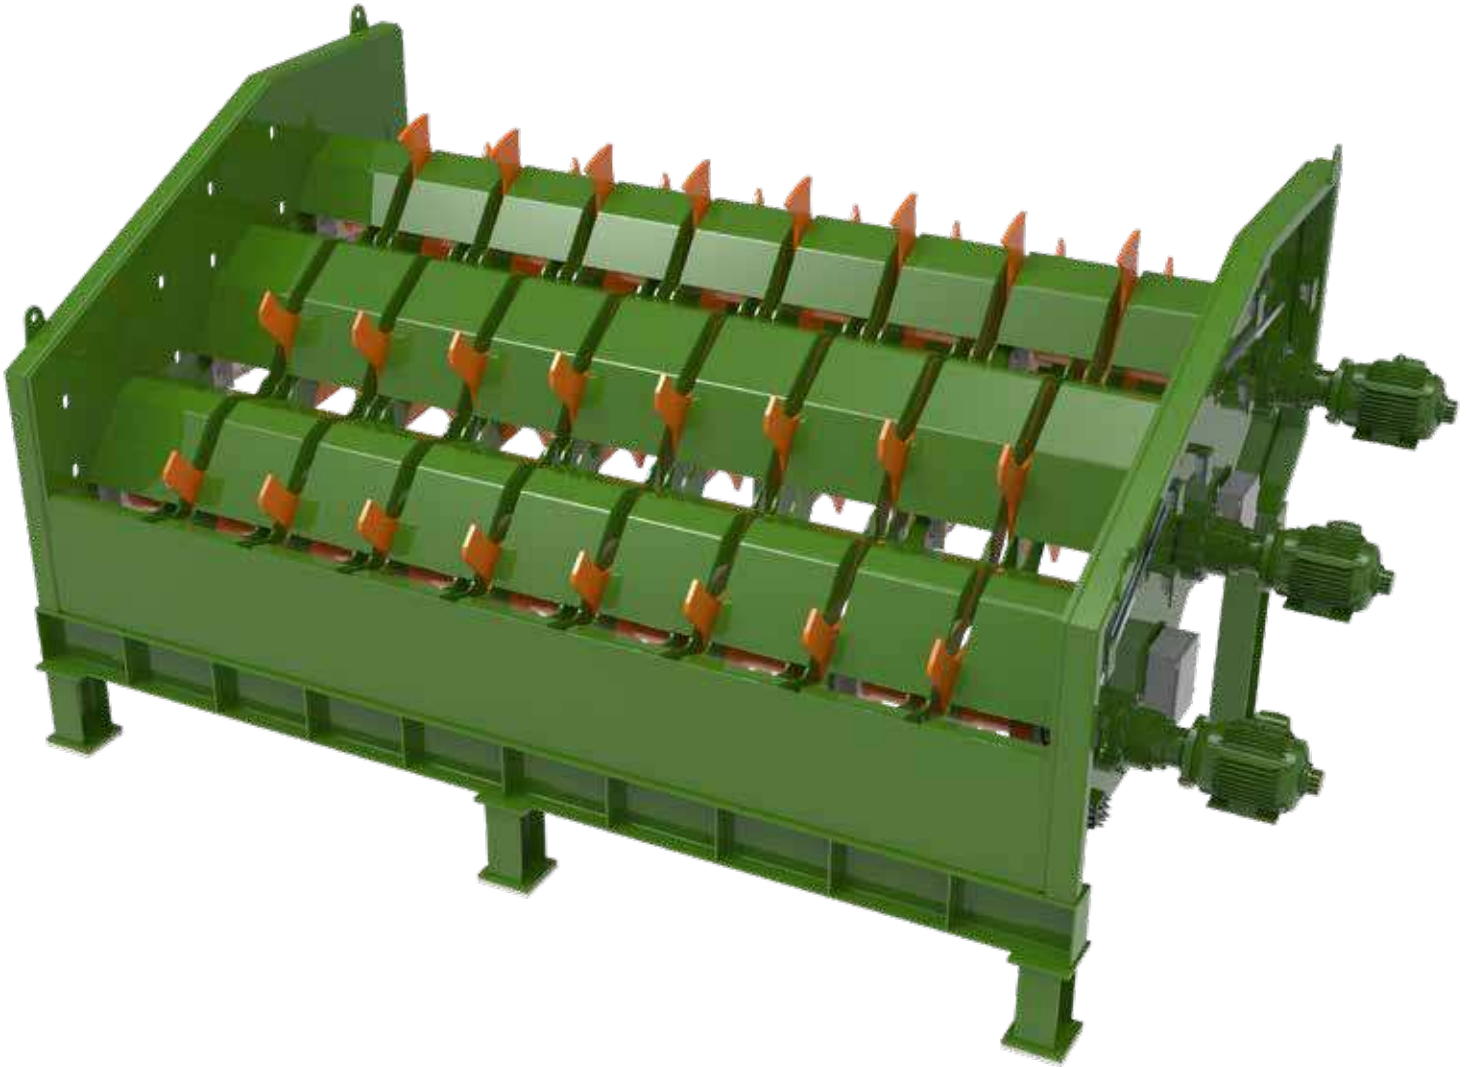

Features & Capabilities

- Heavy & robust construction with ease-of-maintenance in mind
- Feeds logs as fast as you can take them away
- Photo sensors at each stage determine log availability
- Gaps ensure a true self-cleaning design allowing loose material to fall through
- Robust construction (3/4 ton per log foot)
- Independent 20HP electric motors coupled to bonfiglioli planetary reducers
- Designed to your specific rise/run

Rotary Log Singulator

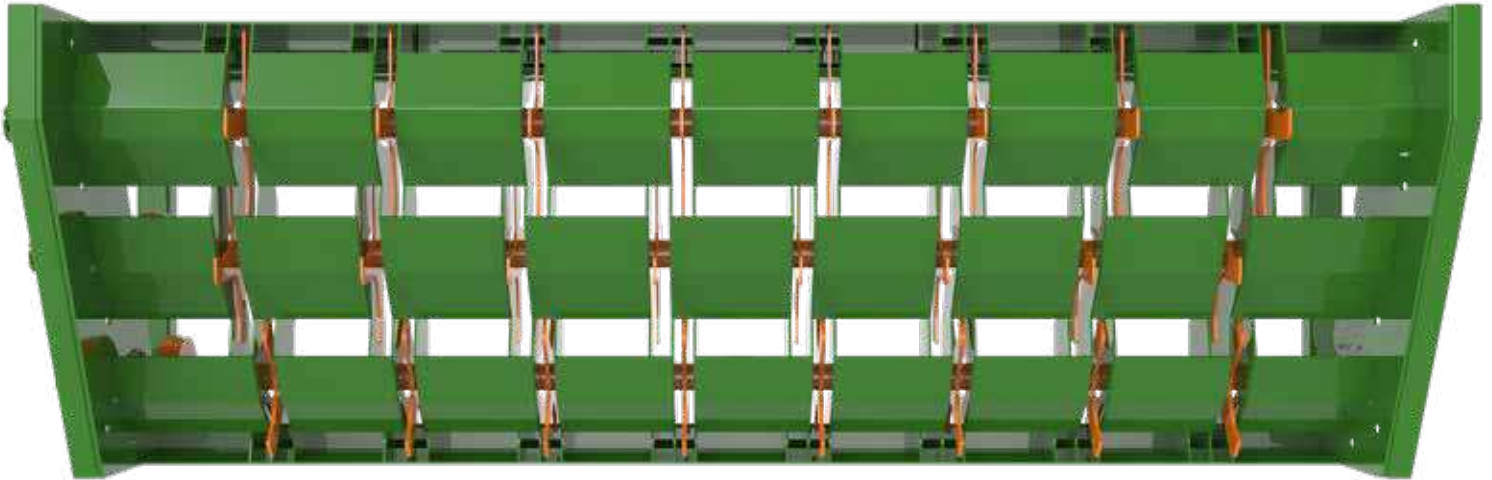

OPERATION

- Large variance in log diameters possible
- Log length
- Multiple stages available
- Designed for your slope requirement

CONSTRUCTION

- Heavy wall pipe
- 1" thick plate rotary arms
- Nylon bearings
- 5/8" & 3/4" steel plate & formings
- **Bonfiglioli 113:1** reduction gearbox
- Independant 15hp electric motors

